




Share:



AP7551

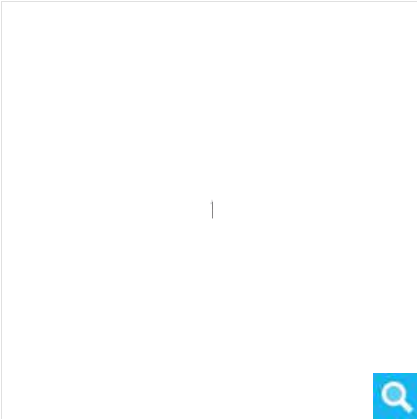

Description: Reliable rack power distribution
Includes : Installation Guide , Toolless Mounting Kit

Product Overview

Technical Specifications

Documentation

Options

Output

Print Technical Specification

Nominal Output Voltage	230V
Maximum Total Current Draw	16

Output Connections
(4) IEC 320 C19 (Battery Backup)
(20) IEC 320 C13 (Battery Backup)

Input

Nominal Input Voltage	200V , 208V , 230V
Input frequency	50/60 Hz
Input Connections	IEC 309 16A 2P+E
Cord Length	0.91meters
Number of Power Cords	1
Load Capacity	3680VA
Maximum Input Current	16A

Physical

Maximum Height	1619mm , 161.9CM
Maximum Width	56mm , 5.6CM
Maximum Depth	44mm , 4.4CM
Net Weight	4.86KG
Shipping weight	5.77KG
Shipping Height	2134mm , 213.4CM
Shipping Width	152mm , 15.2CM
Shipping Depth	127mm , 12.7CM
Color	Black

Environmental

Operating Temperature	0 - 45 °C
Operating Relative Humidity	5 - 95 %
Operating Elevation	0-3000meters
Storage Temperature	-25 - 65 °C
Storage Relative Humidity	5 - 95 %
Storage Elevation	0-15000meters



Approvals CE, CCC, n-EMC, VDE

Standard warranty 2 years repair or replace

Sustainable Offer Status

RoHS Compliant

PEP Available in Documentation tab

EOL Available in Documentation tab

Other Environmental Compliance China RoHS



Sign up to stay up to date with best practices, new solutions and special offers.

Email

I am a...

OK

WHO WE ARE

CONNECT WITH US

FIND A RESELLER

Zip/Postal Code

FIND

CATALOG KEYCODE

Enter Key Code

GO



TERMS & CONDITIONS >

PRIVACY STATEMENT >

© 2018, APC by Schneider Electric