
# LARGE FORMAT PRINTER SURECOLOR™ SC-S40670/S60670





The new Epson SureColor™ S Series printers are Epson's next generation of high-performance eco-solvent signage printers, which incorporates the latest printing technologies to be Epson's most advanced signage printers to date. The printers come with the new sophisticated precision media feeding system, high-performance PrecisionCore™ TFP printheads and a myriad of advanced features that enable them to reliably meet most demanding jobs while minimising operation costs.

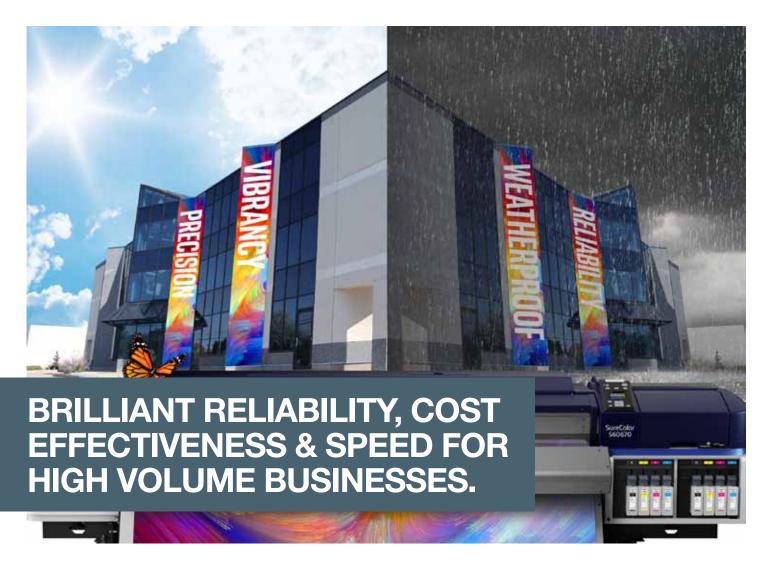

SC-S40670





Printheads\*









Epson Genuine Inks

Environmentally Friendly

Epson UltraChrome™ GS3 ink is Greenguard

Gold certified and meets the French-VOC A+ Class criteria for low chemical emissions.





		00.0	MAXIMUM	MAX. INK CAPACITY	PRECISIONCORE		DS SQM/HR
ı		GS 3	MEDIA WIDTH	PER COLOUR	TFP PRINTHEAD	HIGH QUALITY**	PRODUCTION**
	SC-S40670	ULTRACHROME	64"	700ML	SINGLE	8.6	16.6
	SC-S60670	GS3INK	04	/ UUIVIL	DUAL	14.6	31.6

**ENGINEERED FOR BUSINESS** 

### **Exceptional Print Quality**

Showcasing Epson's industry-leading PrecisionCore™ printhead technology and UltraChrome® GS3 ink, expect consistently vibrant quality with every print.

#### **Superb Reliability**

High-volume printing is made ultra-reliable with an advance precision media feeding system to ensure you minimal downtime.

#### **Engineered for Convenience**

Automatic media alignment, printhead cleaning and remote management features ensure you great ease during operations.





Only available on the SC-\$60670.
 Based on 8-pass printing for high quality and 4-pass printing for production, on banner media.



MODEL NUMBER	SC-S40670	SC-S60670	Dimensions & Weight	
SKU No.	C11CE44403	C11CE46403	SC-S40670	
Printer Width	64"		Weight: 279 kg (without ink)	
Printing Technology			_	*
Print Head	PrecisionCore™ TFP® Printhead	Dual PrecisionCore™ TFP® Printhead		1
Nozzle Configuration	360 x 2 nozzles each colour (x4)	360 x 2 x 2 nozzles each colour (x4)		4.000
Maximum Resolution	1440 x 1440 dpi	Name of the last	1,338 mm	
Minimum Ink Droplet Volume	4.2 pl	R	-	
Print Speed				<b>1</b>
Max Speed - 1 pass	Up to 58.4 m <sup>2</sup> /h (360 x 720 dpi)	Up to 95.3 m <sup>2</sup> /h (360 x 720 dpi)	<b>—</b>	/
High Speed - 2 pass (Billboard)	Up to 29.4 m²/h (720 x 720 dpi)	Up to 52.3 m²/h (720 x 720 dpi)	2,620 mm	/ 880 mm
Production 1 - 3 pass	Up to 20.8 m²/h (720 x 720 dpi)	NA	_	
Production 2 - 4 pass	Up to 16.6 m²/h (720 x 720 dpi)	Up to 31.6 m <sup>2</sup> /h (720 x 720 dpi)	— SC-S60670 Weight: 201 kg (without ink)	
Production 3 - 6 pass	Up to 11.0 m²/h (720 x 1440 dpi)	Up to 20.7 m²/h (720 x 1440 dpi)	Weight: 291 kg (without ink)	
High Quality - 8 pass	Up to 8.6 m²/h (720 x 1440 dpi)	Up to 14.6 m²/h (720 x 1440 dpi)		<b>^</b>
Max Quality 1 - 12 pass	Up to 4.7 m <sup>2</sup> /h (1440 x 1440 dpi)	Up to 8.7 m²/h (1440 x 1440 dpi)		
Max Quality 2 - 16 pass	Up to 3.5 m²/h (1440 x 1440 dpi)	Up to 6.8 m²/h (1440 x 1440 dpi)	1,338	
Max Quality 3 - 24 pass	Up to 2.6 m²/h (1440 x 1440 dpi)	Up to 4.9 m <sup>2</sup> /h (1440 x 1440 dpi)		1,000 11111
Ink System	ορ το 2.0 π /π (1440 x 1440 αρι)	ορ to 4.9 III / II (1440 χ 1440 αρι)		
	Engan LiltraChromaTM CS2 Ink Tophnology			<b>p.</b> 1
Ink Type	Epson UltraChrome™ GS3 Ink Technology		_	070
Colours	4 colours - Cyan, Magenta, Yellow, Black	2,620 mm	972 mm	
Ink Capacity  Page Handling	700 ml ink cartridge	_		
Paper Handling	Rear roll feed (2" / 3" core with max 250 mm diar	Ink Cartridge Compatibility		
Media Type	NA	— 700 ml luly Contriduo		
Printable Area	Max printing width: 1616 mm; Side Margin: 5 mm	700 ml Ink Cartridges • Black	C13T892100	
Media Width		300 to 1626 mm		
Media Thickness	Up to 1 mm	Cyan Magenta	C13T892200 C13T892300	
Heaters	Pre- and Platen- Heater (30 to 50 °C); After-Heater	Yellow	C13T892400	
Control Panel	2.7" Colour LCD			
Connectivity		Supplies & Optional Accessories		
Printer Interfaces	Hi-Speed USB 2.0, 100BASE-TX / 1000BASE-T	<ul> <li>350 ml Cleaning Cartridge</li> </ul>	C13T696000	
Printer Languages	Standard: ESC/P raster	Maintenance Parts Kit	C13S210044	
Printer Drivers	NA	Ink Cleaner	C13T699300	
Memory	512 MB main + 128 MB network	Cleaning Stick Clean Room Wiper	C13S090013 C13S090016	
Software	Standard: CD Installer, Communication Driver, EP	Waste Ink Bottle	C133090010	
	Information, Epson Control Dashboard, EpsonNe	Additional Print Drying System	C12C932381	
	Software Updater	Media Holding Guide	C12C932411	
Other Features	Auto Head Alignment Technology (Media feed and			
	Report System, Custom Paper Backup	<u></u>		
Power and Operating Requirements				
Power Requirements	Input voltage AC 100-240 V 50/60 Hz			
Power Consumption	Operating: Approx. 480 W; Standby: Approx.	Operating: Approx. 745 W; Standby: Approx.		
	330 W w/ heater ON; Sleep: Approx. 12 W;	445 W w/ heater ON; Sleep: Approx. 13 W;		
	Power Off: Less than 1.5 W	Power Off: Less than 1.8 W		
Recommended Operating			© 2016 Epson India Pvt. Ltd. All Rights I	
Temperature & Humidity	15 - 35 °C; 20 - 80 % RH (non-condensing)		Reproduction in part or in whole, without permission from Epson, is strictly prohibit	
Printer Dimensions			EXCEED YOUR VISION are registered tra	ademarks of Seiko
Dimensions	2,620 x 880 x 1,338 mm (W x D x H) (storage)	2,620 x 972 x 1,338 mm (W x D x H) (storage)	Epson Corporation. All other products no company names used herein are for ider	
Weight	279 kg (without ink)	291 kg (without ink)	only and are the trademarks or registerer respective owners. Epson disclaims any	d trademarks of their
Bundled Items	Substrate Support System (C12C932361)	Substrate Support System (C12C932361),	in those marks. Print samples shown are	simulations only.
		Additional Print Drying System (C12C932381)		e subject to change ountries. Please
Marranta	Chandard has a same in the track of a site and a first	<ul> <li>check with local Epson offices for more in</li> </ul>		
Warranty	Standard two years inclusive of parts and printher	au	_	

Note: RIP Software required to print

Information correct at time of printing. Printed in August 2016.

## EPSON INDIA PVT. LTD.

12th Floor, The Millenia, Tower A, No.1, Murphy Road, Ulsoor, Bangalore - 560 008. Tel: 080-30515000 Fax: 080-30515005

## **Regional Offices:**

Ahmedabad - 2640 7176/77, Chennai - 3967 7500, Cochin - 4012 315, Coimbatore - 98942 19200, Indore - 4701 830, Kolkata - 6500 9370/77, Mumbai - 3079 8200, New Delhi - 3312 0300/01, Pune - 3028 6000/05, Hyderabad - 6463 9640/41

CONTACT EPSON TODAY! EMAIL: vasu@eid.epson.co.in

**SOUTH** Alok Singh 098405 03210 **NORTH** Akhtar Imam 099101 08780, Ashutosh Kumar 098153 94550, Sudhir Kumar 093898 35156 **EAST** Sourov Kumar 098746 72616 **WEST** Milind 098209 74733





Epson Helpline: For product info or service - 1800 425 0011 For service - 1860 3000 1600 (9AM - 6PM) (Mon - Sat) Email: Ifp@epsonindia.in

Dealer's Stamp

