


# QuickSpecs


## HP ProLiant ML110 Generation 7 (G7)

### Overview

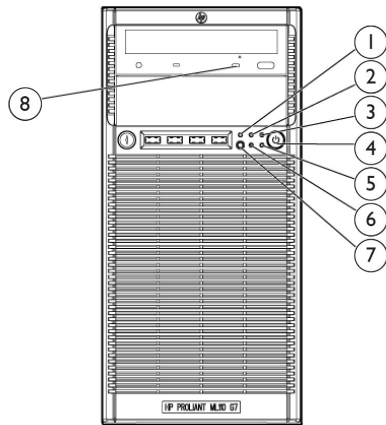

#### Front View

1. System Health LED
2. NIC ink / activity LEDs
3. Optional media drive activity LED
4. Power On / Standby button and system power LED
5. Power Status LED
6. NIC ink / activity LEDs
7. UID LED and button
8. Media Drive Activity LED

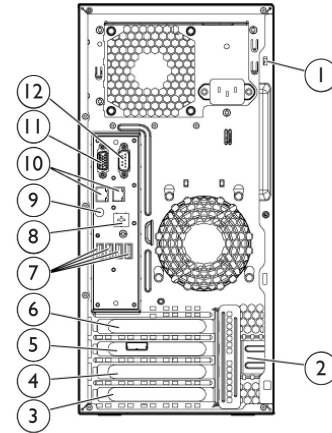

#### Rear View

1. Kensington lock notch
2. PCIe slot cover retainer latch
3. Slot 1 PCIe2x16
4. Slot 2 PCIe2x8
5. Slot 3 PCIe2x8
6. Slot 4 PCIe2x4
7. USB connectors (4)
8. iLO3 dedicated LAN port (optional)
9. UUID button
10. RJ-45 Ethernet connectors (2)
11. Video connector
12. Serial connector

### What's New

- Support for Intel® Celeron® Dual-Core Processors

# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Standard Features

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

#### Processor

One of the following  
depending on Model

#### Quad-Core Processors

Intel® Xeon® E3-1280 (3.50GHz/4-core/8MB/95W, 1333, HT, Turbo 1/2/3/4) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Xeon® E3-1270 (3.40GHz/4-core/8MB/80W, 1333, HT, Turbo 1/2/3/4) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Xeon® E3-1240 (3.30GHz/4-core/8MB/80W, 1333, HT, Turbo 1/2/3/4) Processor

Intel® Xeon® E3-1230 (3.20GHz/4-core/8MB/80W, 1333, HT, Turbo 1/2/3/4) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Xeon® E3-1220 (3.10GHz/4-core/8MB/80W, 1333, Turbo 1/2/3/4) Processor

#### Dual-Core Processors

Intel® Core™ i3-2130 (3.40GHz/2-core/3MB/65W, 1333, HT) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Core™ i3-2120 (3.30GHz/2-core/3MB/65W, 1333, HT) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Core™ i3-2100 (3.10GHz/2-core/3MB/65W, 1333, HT) Processor

Intel® Pentium® G860 (3.0GHz/2-core/3MB/65W, 1333) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Pentium® G850 (2.90GHz/2-core/3MB/65W, 1333) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Pentium® G840 (2.80GHz/2-core/3MB/65W, 1333) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Pentium® G630 (2.70GHz/2-core/3MB/65W, 1333) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Pentium® G620 (2.60GHz/2-core/3MB/65W, 1333) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Celeron® G530 (2.40GHz/2-core/3MB/65W, 1333) Processor

**NOTE:** Available through Configure To Order only. See Factory Integration Models section for more details.

**NOTE:** HT indicates that the processor model supports Intel® Hyper-Threading Technology.

**NOTE:** Turbo indicates the maximum potential frequency increment when using Intel® Turbo Boost Technology, with 4, 3, 2, and 1 cores active.

**NOTE:** DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

#### Cache Memory

One of the following  
depending on Model

Integrated 1x8MB Level3 Intel® Smart Cache

Integrated 1x3MB Level3 Intel® Smart Cache



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Standard Features

<b>Chipset</b>	Intel® C200 chipset <b>NOTE:</b> For more information regarding Intel chipsets, please see the following URL: <a href="http://www.intel.com/products/server/chipsets/">http://www.intel.com/products/server/chipsets/</a>	
<b>Memory Protection</b>	ECC	
<b>Memory</b>	Type	PC3-10600E unbuffered DDR3 ECC up to 1333MHz
	DIMM Slots	Total 4 DIMM slots
	Standard	2GB (1x2GB) or 4GB (2x2GB)
	Maximum	16GB
<b>Network Controller</b>	HP NC112i 1-Port Ethernet Server Adapter (x2)	

Expansion Slots #	Technology	Bus Width***	Connector Width	Bus Number*	Device Number**	Form Factor	Notes
1	PCIe G2	X16	X16			Full height, Full length slot	Gen.2, NHP
2	PCIe G2	X4	X8			Full height & Full-length slot	Gen.2, NHP
3	PCIe G2	X4	X8			Full height & Full-length slot	Gen.2, NHP
4	PCIe G2	X1	X1			Full height & Half-length slot	Gen.2, NHP

\*\* Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

\*\*\* Indicates the number of physical electrical lanes running to a PCI-e connector.

<b>Storage Controller</b>	HP Embedded Smart Array B110i SATA RAID Controller (RAID 0/1/10) <b>NOTE:</b> Supports up to four (4) 3.0Gb/s SATA hard disk drives only <b>NOTE:</b> For set up instructions, please refer to the HP ProLiant ML100 series server user guide at: <a href="http://bizsupport1.austin.hp.com/bc/docs/support/SupportManual/c01708878/c01708878.pdf">http://bizsupport1.austin.hp.com/bc/docs/support/SupportManual/c01708878/c01708878.pdf</a> <b>NOTE:</b> For general information about HP Smart Array B110i SATA RAID Controller, please go to: <a href="http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb110i/index.html">http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb110i/index.html</a>	
---------------------------	--	--



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Standard Features

<b>Internal Storage Devices</b>	<b>Optical Drive</b>	DVD ROM DVD-RW
	<b>Hard Drives</b> <a href="#">One of the following depending on Model</a>	1x250 GB NHP SATA 7200 rpm Drive (Entry Model) 1x250 GB NHP SATA 7200 rpm Drive (Base Model) Up to 4 HP SATA/SAS 3.5" drives supported. None ships standard (Performance Model)
<b>Maximum Internal Storage</b> <a href="#">One of the following depending on Model</a>	<b>Non-Hot Plug SAS LFF</b>	8.0TB (4 x 2TB) 3.5" SAS
	<b>Non-Hot Plug SATA LFF</b>	16.0TB (4 x 4TB) 3.5" SATA
	<b>Hot Plug SAS SFF</b>	4.0TB (4x1TB) 2.5" SAS
		8.0TB (8 x 1TB) 2.5" SAS
<b>Interfaces</b>	Parallel	0
	Serial	1
	Pointing Device (Mouse, USB)	1
	Graphics	1
	Keyboard (USB)	1
	USB 2.0 Ports	9 total (4 rear, 4 front panel, 1 internal)
		<b>NOTE:</b> 1 Dedicated USB port available for internal USB tape connectivity
	Network RJ-45 (Ethernet)	2(10/100/1000 bits/s)
	Remote Management	iLO3 remote management support
		<b>NOTE:</b> If users do not purchase iLO dedicated NIC option card they can still use this port as shared NIC Port.
<b>Industry Standard Compliance</b>	ACPI V3.0b Compliant	
	PCI Express Rev 2.0	
	PXE Support	
	WOL Support	
	IPMI 2.0 compliance	
	DCMI 1.0	
	Microsoft® Logo certifications	
	Red Hat Enterprise Linux Logo certifications	
	SUSE Linux Enterprise Server Logo certifications	
	USB 2.0	
<b>Server Power Cords</b>	6' country specific, lowline NEMA power cord.	



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Standard Features

#### Power Supply

One of the following  
depending on Model

350 Watts Non-Hot Plug, Non redundant Power Supply

460 Watts Common Slot Gold Hot Plug Power Supply

#### System Fans

One (1) - Non-redundant system fan ships standard

One (1) - Non-redundant PCIe fan ships standard

One (1) - Non-redundant CPU heatsink fan ships standard

#### Operating Systems and Virtualization Software Support for ProLiant Servers

[Microsoft Windows Server](#)

[Red Hat Enterprise Linux \(RHEL\)](#)

[SUSE Linux Enterprise Server \(SLES\)](#)

**NOTE:** For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/ossupport> and our driver download page <http://www.hp.com/support/ML110G7>

#### Graphics

Integrated Matrox G200eH, 16MB video standard

- 16 bit color: maximum resolution of 1920 x 1200
- 32 bit color: maximum resolution of 1280 x 1024

**NOTE:** iLO Remote Console is operational in all video mode and color depths. Remote Console viewing displays 15bpp or 32768 colors.

**NOTE:** The resolution and frequency limitations of the attached monitor will further limit the combinations of resolution and depth.

#### Form Factor

Micro ATX Tower (4U)

**NOTE:** Rack mounting available via HP Tower to Rack Conversion Tray, Universal Kit. Please see the options section in this QuickSpecs.

#### HP Insight management software

#### HP Insight Foundation suite for ProLiant

Insight Foundation is being baselined at version v8.70 which means the following:

- Its Media Kit (contains 2 SmartStart CDs, the Firmware DVD, and the Management DVD) will continue to ship with all supported ProLiant G7 or earlier BTO servers until the last supported server is no longer shipping.
- The Media Kit will not be updated past version 8.70.
- ProLiant G7 or earlier CTO servers are able to order the Media Kit with the understanding that the media is not updated. Please check specific server QuickSpecs for availability of CTO Kit.
- PSP and Firmware DVD downloads will be updated through 2Q 2012 at the HP Insight Foundation Suite for ProLiant downloads tab: <http://www.hp.com/go/foundation>

Customers are urged to use the replacement product, HP Service Pack for ProLiant, instead of Insight Foundation Suite which is found at these location:



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Standard Features

- [www.hp.com/go/spp](http://www.hp.com/go/spp)
- [www.hp.com/go/spp/download](http://www.hp.com/go/spp/download)

#### HP Integrated Lights-Out 3 (iLO) 3 (3)

HP Integrated Lights-Out 3 (iLO) simplifies server setup, health monitoring, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand with HP Systems Insight Manager, Insight Control suites, and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: [www.hp.com/go/iLO](http://www.hp.com/go/iLO)

### Security

Power-on password  
Setup password  
Secure Sockets Layer (SSL)  
Secure Shell (SSH)  
iLO 3 (Integrated Lights-Out 3) has 12 customizable user accounts and SSL encryption  
iLO 3 can be disabled via a Global Setting  
iLO Advanced supports directory services integration

### Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair are available for one year from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**NOTE:** Server Warranty includes 1 year parts, 1 year labor, 1-year on-site support with next business day response. (3-1-1 warranty offered in Brazil only). Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Optional Features

**HP Proactive Insight experience**

Prevent problems with innovative, automated monitoring tools and proactive services. The HP Proactive Insight experience consist of using Insight Online, Insight Remote Support, and Proactive Care Support Service as one integrated solution. The Proactive Insight experience provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: [www.hp.com/go/proactiveinsightexperience](http://www.hp.com/go/proactiveinsightexperience)

**Factory Express Portfolio for Servers and Storage**

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and/or storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging and custom packaging HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers, as well as, the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>

**HP Simple Configurator**

SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Service and Support

#### Service and Support

#### HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

#### What HP ProLiant and BladeSystem Services can do for you

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs.

#### HP Technology Services meets business challenges with services offered in three packages: **Optimized Care Package, Standard Care Package, and Basic Care Package**

Available for each product group. Such packaged solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support packages for servers, storage, networking and software.

---

#### Optimized Care Package    Supports maintaining servers at optimum performance availability

##### HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.  
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

##### 3-Year HP 6 hour Hardware Support Onsite Call-to-Repair Service

Provides an IT manager with a team of support specialists who will quickly begin troubleshooting the system to help return the hardware to operating condition within 6 hours of the initial service request to the HP Global Solution Center.  
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EN.pdf>

##### Additional Services

Software OS (Microsoft, Linux (SUSE/Red Hat) Installation and Start Up and Software Support) plus Microsoft or Linux education courses +30 Proactive Select Credits, Factory Express.

---



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Service and Support

#### Standard Care Package

#### Package that maintains high level of server availability

##### HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

##### 3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service

Provides you with rapid remote support and if required an HP authorized representative who will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EEE.pdf>

##### Additional Services

Software OS (Microsoft, Linux (SUSE/Red Hat) Installation and Start Up and Software Support); +10 Proactive Select Credits, Factory Express.

#### Basic Care Package

#### Delivers minimum recommended support service level

##### HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

##### 3-Year HP 13x5 4 hour Response, Hardware Support Onsite Service

Delivers increased equipment availability and productivity with rapid remote support and onsite response for your HP server and storage hardware.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EEE.pdf>

##### Additional Services

Software OS (Microsoft, Linux (SUSE/Red Hat) Installation and Start Up and Software Support), Factory Express.

#### Insight Remote Support

The packages include HP Insight Remote Support that uses proven technology to deliver secure, reliable 24x7 remote monitoring, diagnoses, and problem resolution. It is available at no additional cost to all warranty, HP Care Pack Service, and service agreement customers.

#### For more information

To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner or visit: <http://www.hp.com/services/proliant>



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Pre-configured Models

#### SATA Models

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

**NOTE:** Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

**NOTE:** HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

**NOTE:** If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

**NOTE:** Not all models are available in all regions. Check with your local country HP offices for availability.

**NOTE:** For general information about HP Smart Array B110i SATA RAID Controller, please visit:

<http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb110i/index.html>

**NOTE:** RAID setting requires the selection of an additional Smart Array Controller.

<b>Entry Model</b>	<b>Processor</b>	Intel® Core™ i3-2100 (3.10GHz/2-core/3MB/65W, 1333, HT) Processor
	<b>Cache Memory</b>	3MB Intel® Smart Cache
<b>HP ProLiant ML110 G7 i3-2100 1P 2GB-U Non-hot Plug 250GB SATA 350W PS Server</b>	<b>Memory</b>	2GB (1 x 2GB) PC3-10600E DDR3 UB ECC <b>NOTE:</b> Total 4 DIMM slots.
626473-xx1	<b>Network Controller</b>	HP NC112i 1-Port Ethernet Server Adapter (x2)
	<b>Storage Controller</b>	HP Embedded Smart Array B110i SATA RAID Controller (4 ports for HDD)
	<b>Hard Drive</b>	1 x 250GB 3.5" Non-hot plug SATA
	<b>Internal Storage</b>	Up to 8.0TB (4 x 2.0TB) Non-hot plug LFF SATA (Maximum)
	<b>Optical Drive</b>	HP Half-Height 16x SATA DVD-ROM
	<b>Power Supply</b>	350 Watts Non-Hot Plug, Non redundant Power Supply
	<b>Fans</b>	One (1) - Non-redundant system fan ships standard One (1) - Non-redundant PCIe fan ships standard One (1) - Non-redundant CPU heatsink fan ships standard
	<b>Management</b>	HP Integrated Lights-Out Standard (iLO 3)
	<b>Form Factor</b>	Micro ATX Tower (4U)
	<b>Warranty</b>	Server Warranty includes 1 year parts, 1 year labor, 1-year on-site support with next business day response. (3-1-1 warranty offered in Brazil only).



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Pre-configured Models

<b>Base Model</b>	<b>Processor</b>	Intel® Xeon® E3-1220 (3.10GHz/4-core/8MB/80W, 1333, Turbo 1/2/3/4) processor
<b>HP ProLiant ML110 G7 E3-1220 1P 2GB-U Non-hot Plug 250GB SATA 350W PS Server</b> 626474-xx1	<b>Cache Memory</b>	8MB Intel® Smart Cache
	<b>Memory</b>	2GB (1x2GB) PC3-10600E DDR3 UB ECC <b>NOTE:</b> Total 4 DIMM slots.
	<b>Network Controller</b>	HP NC112i 1-Port Ethernet Server Adapter (x2)
	<b>Storage Controller</b>	HP Embedded Smart Array B110i SATA RAID Controller (4 ports for HDD)
	<b>Hard Drive</b>	1 x 250GB Non-hot-plug LFF SATA
	<b>Internal Storage</b>	Up to 8.0TB (4 x 2.0TB) Non-hot plug LFF SATA (Maximum)
	<b>Optical Drive</b>	HP Half-Height 16x SATA DVD-ROM
	<b>Power Supply</b>	350 Watts Non-Hot Plug, Non redundant Power Supply
	<b>Fans</b>	One (1) - Non-redundant system fan ships standard One (1) - Non-redundant PCIe fan ships standard One (1) - Non-redundant CPU heatsink fan ships standard
	<b>Management</b>	HP Integrated Lights-Out Standard (iLO 3)
	<b>Form Factor</b>	Micro ATX Tower (4U)
	<b>Warranty</b>	Server Warranty includes 1 year parts, 1 year labor, 1-year on-site support with next business day response. (3-1-1 warranty offered in Brazil only).
<hr/>		
<b>Performance model</b>	<b>Processor</b>	Intel® Xeon® E3-1240 (3.30GHz/4-core/8MB/80W, 1333, HT, Turbo 1/2/3/4) processor
<b>HP ProLiant ML110 G7 E3-1240 1P 4GB-U Hot Plug SATA 460W RPS Server</b> 626475-xx1	<b>Cache Memory</b>	8MB Intel® Smart Cache
	<b>Memory</b>	4GB (2x2GB) PC3-10600E DDR3 UB ECC <b>NOTE:</b> Total 4 DIMM slots.
	<b>Network Controller</b>	HP NC112i 1-Port Ethernet Server Adapter (x2)
	<b>Storage Controller</b>	HP Embedded Smart Array B110i SATA RAID Controller (4 ports for HDD)
	<b>Hard Drive</b>	None ship standard
	<b>Internal Storage</b>	Up to 8.0TB (4 x 2.0TB) hot plug LFF SATA (Maximum)
	<b>Optical Drive</b>	HP Half-Height 16x SATA DVD-RM
	<b>Power Supply</b>	HP 460W Common Slot Gold Hot Plug Power Supply <b>NOTE:</b> HP RPS Enablement Kit included. To enable redundancy an additional 460W PS (P/N 503296-B21) needs to be purchased.
	<b>Fans</b>	One (1) - Non-redundant system fan ships standard One (1) - Non-redundant PCIe fan ships standard One (1) - Non-redundant CPU heatsink fan ships standard
	<b>Management</b>	HP Integrated Lights-Out Standard (iLO 3)
	<b>Form Factor</b>	Micro ATX Tower (4U)
	<b>Warranty</b>	Server Warranty includes 1 year parts, 1 year labor, 1-year on-site support with next business day response. (3-1-1 warranty offered in Brazil only). <b>NOTE:</b> A HP Smart Array Hot Plug Advance Pack for B110i w/1y 24x7 Supp Physical 1 Svr LTU (TC421A) is required for Hot plug system.



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Pre-configured Models

---

<b>Country Code Key</b>	xx=00	NA
	xx=01	Australia
	xx=03	UK
	xx=04	Germany
	xx=05	France
	xx=37	AP
	xx=42	Euro
	xx=AA	PRC (Excludes 626473-xx1)

## Configuration Information - Factory Integrated Models

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

**NOTE:** Configure-to-order (CTO) servers must start with a CTO Chassis.

**NOTE:** FIO indicates that this option is only available as a factory installable option.

## Step 1: Base Configuration

<b>HP Models</b>	HP ProLiant ML110 G7 Hot Plug 4 LFF Configure-to-order Server	647337-B21
	<p><b>Factory Integrated Models ship with:</b></p> <p>Embedded NC112i Gigabit Ethernet Server Adapter (x2)</p> <p>HP Integrated Lights-Out Standard (iLO 3)</p> <p>HP Embedded Smart Array B110i SATA RAID Controller (RAID 0/1/10), 4 ports for HDD</p> <p><b>NOTE:</b> For set up instructions for HP Smart Array B110i SATA Controller please refer to the HP ProLiant ML100 series server user guide at:  <a href="http://bizsupport1.austin.hp.com/bc/docs/support/SupportManual/c01708878/c01708878.pdf">http://bizsupport1.austin.hp.com/bc/docs/support/SupportManual/c01708878/c01708878.pdf</a></p> <p><b>NOTE:</b> For general information about HP Smart Array B110i SATA RAID Controller, please visit:  <a href="http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb110i/index.html">http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb110i/index.html</a></p> <p>Non hot-plug SAS/SATA 4 port cable</p> <p>PCA</p> <p>Power cord</p> <p>Micro ATX Tower (4U)</p>	
	<p>HP ProLiant ML110 G7 Hot Plug 8 SFF Configure-to-order Server</p> <p><b>Factory Integrated Models ship with:</b></p> <p>Embedded NC112i Gigabit Ethernet Server Adapter (x2)</p> <p>HP Integrated Lights-Out Standard (iLO 3)</p> <p>HP Embedded Smart Array B110i SATA RAID Controller (RAID 0/1/10), 4 ports for HDD</p> <p><b>NOTE:</b> For set up instructions for HP Smart Array B110i SATA Controller please refer to the HP ProLiant ML100 series server user guide at:  <a href="http://bizsupport1.austin.hp.com/bc/docs/support/SupportManual/c01708878/c01708878.pdf">http://bizsupport1.austin.hp.com/bc/docs/support/SupportManual/c01708878/c01708878.pdf</a></p> <p><b>NOTE:</b> For general information about HP Smart Array B110i SATA RAID Controller, please visit:  <a href="http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb110i/index.html">http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb110i/index.html</a></p> <p>Non hot-plug SAS/SATA 4 port cable</p> <p>PCA</p> <p>Power cord</p> <p>Micro ATX Tower (4U)</p>	647338-B21

# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Configuration Information - Factory Integrated Models

HP ProLiant ML110 G7 Non-hot Plug 4 LFF Configure-to-order Server 647336-B21

**Factory Integrated Models ship with:**

Embedded NC 112i Gigabit Ethernet Server Adapter (x2)

HP Integrated Lights-Out Standard (iLO 3)

HP Embedded Smart Array B110i SATA RAID Controller (RAID 0/1/10), 4 ports for HDD

**NOTE:** For set up instructions for HP Smart Array B110i SATA Controller please refer to the HP ProLiant ML100 series server user guide at:

<http://bizsupport1.austin.hp.com/bc/docs/support/SupportManual/c01708878/c01708878.pdf>

**NOTE:** For general information about HP Smart Array B110i SATA RAID Controller, please visit:

<http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb110i/index.html>

Non hot-plug SAS/SATA 4 port cable

PCA

Power cord

Micro ATX Tower (4U)

### Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

#### HP Processors

##### Quad-Core Processor

HP ML110 G7 Intel® Xeon® E3-1280 (3.50GHz/4-core/8MB/95W) FIO Processor Kit	645836-L21
HP ML110 G7 Intel® Xeon® E3-1270 (3.40GHz/4-core/8MB/80W) FIO Processor Kit	639704-L21
HP ML110 G7 Intel® Xeon® E3-1240 (3.30GHz/4-core/8MB/80W) FIO Processor Kit	639703-L21
HP ML110 G7 Intel® Xeon® E3-1230 (3.20GHz/4-core/8MB/80W) FIO Processor Kit	639702-L21
HP ML110 G7 Intel® Xeon® E3-1220 (3.10GHz/4-core/8MB/80W) FIO Processor Kit	639701-L21

##### Dual-Core Processor

HP ML110 G7 Intel® Core™ i3-2130 (3.40GHz/2-core/3MB/65W) FIO Processor Kit	663405-L21
HP ML110 G7 Intel® Xeon® i3-2120 (3.30GHz/2-core/3MB/65W) FIO Processor Kit	643290-L21
HP ML110 G7 Intel® Xeon® i3-2100 (3.10GHz/2-core/3MB/65W) FIO Processor Kit	643288-L21
HP ML110 G7 Intel® Pentium® G860 (3.0GHz/2-core/3MB/65W) FIO Processor Kit	663404-L21
HP ML110 G7 Intel® Pentium® G850 (2.90GHz/2-core/3MB/65W) FIO Processor Kit	656604-L21
HP ML110 G7 Intel® Pentium® G840 (2.80GHz/2-core/3MB/65W) FIO Processor Kit	656603-L21
HP ML110 G7 Intel® Pentium® G630 (2.70GHz/2-core/3MB/65W) FIO Processor Kit	663403-L21
HP ML110 G7 Intel® Pentium® G620 (2.60GHz/2-core/3MB/65W) FIO Processor Kit	656602-L21
HP ML110 G7 Intel® Celeron G530 (2.40GHz/2-core/2MB/65W) FIO Processor Kit	663402-L21

#### HP Memory

HP 4GB (1x4GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500672-B21
HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500670-B21

**NOTE:** All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool at: [www.hp.com/go/ddr3memory-configurator](http://www.hp.com/go/ddr3memory-configurator).

#### HP Power Supplies

HP 350W Factory Integrated Power Supply Kit	646146-B21
---	------------



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Configuration Information - Factory Integrated Models

HP 460W Common Slot Gold Hot Plug Power Supply Kit	503296-B21
<b>NOTE:</b> To upgrade to the HP 460W Common Slot Gold Hot Plug Power Supply and to add support for redundant power supplies, customers need to purchase one HP RPS G7 4U Enablement Kit (P/N 637464-B21).	
<b>NOTE:</b> If RPS option is enabled on the system, the combination of all Internal Media Drives cannot exceed 1.	
<b>Power Options</b>	
HP RPS G7 4U Enablement Kit	637464-B21

### Step 3: Choose Additional Factory Integratable Options (only one of the following from each list unless otherwise noted)

<b>HP Storage Controllers</b>	HP Smart Array P410/256 BBWC 2-ports Int PCIe x8 FIO SAS Controller	491195-B21
	HP Smart Array P410/ZM 2-ports Int PCIe x8 FIO SAS Controller	462860-B21
	HP Smart Array P212/256 BBWC 1-ports Int/1-ports Ext PCIe x8 FIO SAS Controller	491191-B21
<b>HP Insight Software</b>	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
<b>HP ProLiant Foundation Pack Software</b>	HP ProLiant Foundation Pack Single Release Factory Integrated Software	534516-B21

### Step 4: Choose Additional Options for Factory Integration

**NOTE:** For additional "Core Options" and "Additional Options", please refer to the "Options" sections below.



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Core Options

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

<b>HP Memory</b>	HP 4GB (1x4GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500672-B21
	HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500670-B21

**NOTE:** All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool at: [www.hp.com/go/ddr3memory-configurator](http://www.hp.com/go/ddr3memory-configurator).

<b>HP Optical Drives</b>	HP Half-Height SATA DVD-ROM Optical Drive	447326-B21
	HP Half-Height SATA DVD-RW Optical Drive	447328-B21

<b>HP Drive Cage Options</b>	HP 4U LFF Hot Plug Drive Cage Kit	637216-B21
	HP 4U SFF Hot Plug Drive Cage Kit	637460-B21

**NOTE:** Above drive cage functional, HDDs, cable and backplane are included.

**NOTE:** This LFF drive cage is for field upgrade only - from NHP LFF to HP LFF.

**NOTE:** The SFF drive cage is for field upgrade only. This is used to upgrade from NHP LFF or HP LFF to HP SFF.

**NOTE:** A HP Smart Array Hot Plug Advance Pack for B110i w/1y 24x7 Supp Physical 1 Svr LTU (TC421A) is required for any Hot plug system in addition to the drive cage kit.

### HP Hard Drives

**NOTE:** The components of a storage subsystem (e.g. the drive, the HBA/controller, and firmware) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

**NOTE:** Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

#### SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 3G SATA 7.2K rpm SFF (2.5-inch) Hot Plug Midline 1yr Warranty Hard Drive	625609-B21
HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive	507750-B21

#### SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	507632-B21
HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	454146-B21
HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	458928-B21

#### SATA Hot Plug LFF (3.5-inch) Entry (ETY) Drives

HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Entry 1yr Warranty Hard Drive	571230-B21
--	------------

#### SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	507774-B21
HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	507772-B21
HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	458941-B21

#### SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives

HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive	571232-B21
---	------------





# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Core Options

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13021\\_div/13021\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html)  
(Worldwide)

#### SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HP 1.2TB 6G SAS 10K SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	693648-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	619291-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21

#### SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	605835-B21
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507610-B21

#### SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	516828-B21
HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	516816-B21
HP 300GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	516814-B21

#### SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	605835-B21
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507610-B21

#### SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507616-B21
HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507614-B21

#### SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

**NOTE:** Support for SAS non-hot plug drives requires HP SAS/Smart Array Controller. See Step 3 below.

HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	516830-B21
HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	516826-B21
HP 300GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	516824-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/12244\\_div/12244\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html)  
(Worldwide)

#### SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 3G SATA 7.2K rpm SFF (2.5-inch) Hot Plug Midline 1yr Warranty Hard Drive	625609-B21
HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive	507750-B21

#### SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 4TB 3G SATA 7.2k rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	694374-B21
HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	507632-B21
HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	454146-B21



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Core Options

HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	458928-B21
<b>SATA Hot Plug LFF (3.5-inch) Entry (ETY) Drives</b>	
HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Entry 1yr Warranty Hard Drive	571230-B21
<b>SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives</b>	
HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	507774-B21
HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	507772-B21
HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	458941-B21
<b>SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives</b>	
HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive	571232-B21
<b>NOTE:</b> Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html">http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html</a> (Worldwide)	

### HP Networking

HP NC112T PCI Express Gigabit Server Adapter	503746-B21
HP NC360T PCI-E Dual Port Gigabit Server Adapter	412648-B21
HP NC365T 4-port Ethernet Server Adapter	593722-B21
HP NC373T PCI-E Multifunction Gigabit Server Adapter	394791-B21
HP NC375T PCI Express Quad Port Gigabit Server Adapter	538696-B21
HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter	458492-B21
<b>NOTE:</b> Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://www.hp.com/go/ProLiantNICs">www.hp.com/go/ProLiantNICs</a>	

### HP I/O Expansion Options

HP Dedicated iLO Management Port Option	514206-B21
---	------------

### HP Power Supplies

HP 460W Common Slot Gold Hot Plug Power Supply Kit	503296-B21
<b>NOTE:</b> To upgrade to the HP 460W Common Slot Gold Hot Plug Power Supply and to add support for redundant power supplies, customers need to purchase one HP RPS G7 4U Enablement Kit (P/N 637464-B21).	
<b>NOTE:</b> If RPS option is enabled on the system, the combination of all Internal Media Drives cannot exceed 1.	
<b>Power Options</b>	
HP RPS G7 4U Enablement Kit	637464-B21



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Additional Options

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

#### HP Insight Software

#### HP Insight Control

HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License C6N28AAE

HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License C6N27A

HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Electronic License C6N36AAE

HP Insight Control Server Provisioning Media Kit BD883A

HP Insight Management Media Kit C6N31A

**NOTE:** Insight Software DVD media without licenses. Contains HP Systems Insight Manager, HP Insight Control, HP Insight Dynamics, HP Insight Control for Microsoft System Center, and Virtual Connect Enterprise Manager software. Uses an integrated installer to perform quick and accurate software installation and updates.

**NOTE:** Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

**NOTE:** Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

**NOTE:** For additional license options please see the Insight Control QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/12631\\_div/12631\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html)

#### HP Insight Control server deployment

HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License T9082AAE

HP Insight Control Server Deployment including 1yr 24x7 Support Single Server License 452151-B21

**NOTE:** Licenses ship without media. The Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

**NOTE:** Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

**NOTE:** For additional license kits please see the Insight Control QuickSpecs at: [http://h18004.www1.hp.com/products/quickspecs/12631\\_div/12631\\_div.html](http://h18004.www1.hp.com/products/quickspecs/12631_div/12631_div.html)

#### HP Integrated Lights-Out (iLO) Advanced

HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License TA850AAE

HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License 512485-B21

**NOTE:** This license allows 1 server to be deployed and managed via HP iLO Advanced. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

HP iLO Advanced Electronic License with 3yr 24x7 Tech Support and Updates BD506AAE

HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates BD505A



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Additional Options

**NOTE:** For additional license kits, including electronic delivery options, please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/14276\\_div/14276\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14276_div/14276_div.html)

#### HP Security (TPM)

##### HP Trusted Platform Module Option

488069-B21

**NOTE:** The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline.

**NOTE:** For more information about TPM, please visit: [www.hp.com/go/TPM](http://www.hp.com/go/TPM)

**NOTE:** ProLiant OS pre-installed units will come with the partition required for TPM deployment.

**NOTE:** The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

#### HP Storage Controllers

##### SAS Controllers

**NOTE:** Support for SAS hard drives/tape drive requires selection of a SAS controller.

**NOTE:** Support for hardware RAID requires selection of a SAS controller.

##### Smart Array P212 Controller

HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller

462828-B21

HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller

462834-B21

##### Smart Array P410 Controller

HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller

462862-B21

HP Smart Array P410/512 BBWC 2-ports Int PCIe x8 SAS Controller

462864-B21

HP Smart Array P410/1G FBWC 2-ports Int PCIe x8 SAS Controller

572532-B21

HP Smart Array P410/512 FBWC 2-ports Int PCIe x8 SAS Controller

578230-B21

##### Optional Upgrades

HP 1GB Flash Backed Cache

534562-B21

HP 512MB Flash Backed Write Cache

534916-B21

HP 256MB P-series Cache Upgrade

462968-B21

HP 512MB P-Series Battery Backed Write Cache Upgrade

462967-B21

HP 650 mAh P-Series Battery

462969-B21

**NOTE:** Required to enable BBWC on the 256MB cache.

**NOTE:** Please see the following QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13201\\_div/13201\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html)  
(Smart Array P212 Controller)

[http://h18000.www1.hp.com/products/quickspecs/13203\\_div/13203\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html)  
(Smart Array P410 Controller)



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Additional Options

HP Smart Array Advanced Pack including 1yr 24x7 Technical Support and Updates Single Server License	516471-B21
HP Smart Array Hot Plug Advance Pack for B110i w/1y 24x7 Supp Physical 1 Svr LTU	TC421A
<b>NOTE:</b> Please see the following QuickSpecs for Technical Specifications and additional information: <a href="http://h18004.www1.hp.com/products/quickspecs/13200_div/13200_div.html">http://h18004.www1.hp.com/products/quickspecs/13200_div/13200_div.html</a> (Worldwide)	
<b>SCSI HBA</b>	
HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
<b>NOTE:</b> Supports SCSI Tapes only, no RAID support.	
<b>NOTE:</b> HBA is recommended for SCSI tape drive support.	
<b>NOTE:</b> Please see the following QuickSpecs for Technical Specifications and additional information: <a href="http://h18004.www1.hp.com/products/quickspecs/12566_div/12566_div.html">http://h18004.www1.hp.com/products/quickspecs/12566_div/12566_div.html</a> (SC11Xe HBA)	

### HP Backup & Recovery Software

HP Data Protector Express V6.0 for 1 Server E-LTU	TC330BAE
HP Data Protector Express V6.0 for 3 Server E-LTU	TC331BAE
HP Data Protector Express V6.0 for 10 Server E-LTU	TC332BAE
HP Basic Upgrade to Data Protector Express V6 for 1 Server E-LTU	TC333BAE
<b>NOTE:</b> One of these Data Protector Express base products is required. To see available options: <a href="http://www.hp.com/go/dataprotectorexpress">http://www.hp.com/go/dataprotectorexpress</a>	

### HP Tape Backup

<b>NOTE:</b> For the complete range of tape drives, autoloaders, libraries and media see: <a href="http://www.hp.com/go/tape">http://www.hp.com/go/tape</a> . For hardware and software compatibility of HP tape backup products see: <a href="http://www.hp.com/go/connect">http://www.hp.com/go/connect</a> .	
HP DAT 320 USB Internal Tape Drive	AJ825A
HP DAT 320 SAS Internal Tape Drive	AJ830A
<b>NOTE:</b> Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.	
HP StoreEver LTO-2 Ultrium 448 SAS Internal Tape Drive	DW085B
<b>NOTE:</b> Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.	
HP StoreEver LTO-3 Ultrium 920 SAS Internal Tape Drive	EH847B
<b>NOTE:</b> Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.	
HP 1/8 G2 Ultrium 920 SAS Autoloader	AH558A
<b>NOTE:</b> Requires HP 1U Tape Autoloader Rack-Mount Kit (AH166A) for rack installation. Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.	
HP MSL2024 Ultrium 920 SAS Tape Library	AH559A
<b>NOTE:</b> Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.	



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Additional Options

#### HP Disk Backup

**NOTE:** For the complete range of D2D Backup Systems see:

<http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk backup products see: <http://www.hp.com/go/connect>.

#### HP D2D Backup Systems with Backup Data Deduplication

**NOTE:** These are network connected appliances with connectivity using the iSCSI protocol. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.

HP D2D2502i Backup System

EJ001B

**NOTE:** 1.5TB of usable network disk backup capacity. Network connected appliance with connectivity using the iSCSI protocol. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.

HP D2D2504i Backup System

EJ002B

**NOTE:** 3.0TB of usable network disk backup capacity. Network connected appliance with connectivity using the iSCSI protocol. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.

#### USB Removable Media RDX Disk Backup Systems

HP RDX320 Internal Removable Disk Backup System

AJ767A

**NOTE:** 320GB of disk capacity per data cartridge.

HP RDX500 Internal Removable Disk Backup System

AJ934A

**NOTE:** 500GB of disk capacity per data cartridge.

HP RDX1000 Internal Removable Disk Backup System

BV847A

**NOTE:** 1TB of disk capacity per data cartridge.

HP RDX1000 USB3.0 Internal Disk Backup System

B7B67A

HP RDX500 USB3.0 Internal Disk Backup System

B7B64A

HP RDX320 USB3.0 Internal Disk Backup System

B7B62A

#### HP Uninterruptible Power Systems

##### HP Tower UPS

##### HP T750 G2 UPS Models

HP T750 G2 750VA INTL Tower Uninterruptible Power System

AF447A

HP T750 G2 750VA NA Tower Uninterruptible Power System

AF446A

HP T750J JP Uninterruptible Power System

AF456A

##### HP T1000 G3 UPS Models

HP T1000 G3 1000VA INTL Tower Uninterruptible Power System

AF449A

HP T1000 G3 1000VA NA Tower Uninterruptible Power System

AF448A

HP T1000J JP Uninterruptible Power System

AF457A

**NOTE:** For additional information regarding HP Uninterruptible Power Systems, please see the following URL: [www.hp.com/go/rackandpower](http://www.hp.com/go/rackandpower) (Worldwide)

**NOTE:** For additional information on sizing your server, please reference: <http://www.upssizer.com>

**NOTE:** Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: [www.hp.com/products/powercords](http://www.hp.com/products/powercords).



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Additional Options

#### HP Rack Series

##### HP Rack 10000 G2 Series (Graphite Metallic)

HP 10642 G2 1200mm deep Shock Rack

AF092A

**NOTE:** It is mandatory to use a shock pallet when shipping racks with equipment installed.

**NOTE:** Please see the Rack 10000 G2 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:

[http://h18000.www1.hp.com/products/quickspecs/12402\\_div/12402\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html)  
(Worldwide)

**NOTE:** For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower> (Worldwide)

**NOTE:** The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 G2 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

**CAUTION:** If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment:

- Front and rear doors: If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).
- Side: The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

**CAUTION:** Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

**NOTE:** Support for all 2 and 4 post Telco racks and threaded hole racks requires an additional option kit from Rack Solutions. The Rack Solutions brackets can be purchased at: [www.hp.com/go/rackandpower](http://www.hp.com/go/rackandpower).

#### HP Rack Options

HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21
HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-B21
HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-B21
HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-B21
HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-B21
HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-B21
HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-B21
HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-B21
HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-B21
HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-B21
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373
HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B33





# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Additional Options

HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133
HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143
HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223
HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353
HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103
HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113
HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-KD3
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13972\\_div/13972\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13972_div/13972_div.html)  
(Worldwide)

#### HP KVM Switch Options

HP Server Console 0x2x8 Port Analog Switch	AF616A
HP Server Console 0x2x16 Port Analog Switch	AF617A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/11834\\_div/11834\\_div.html](http://h18000.www1.hp.com/products/quickspecs/11834_div/11834_div.html)  
(Worldwide)

HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13475\\_div/13475\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13475_div/13475_div.html)  
(Worldwide)

HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13474\\_div/13474\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13474_div/13474_div.html)  
(Worldwide)

#### Rack Kit

HP Tower to Rack Conversion Tray Universal Kit	417705-B21
--	------------





# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

---

### Additional Options

#### HP Care Pack Services

##### Hardware Services Next Business Day On-Site Service

HP 3 year Next business day ProLiant ML110 Hardware Support U4433E

##### Hardware Services - 4-Hour On-site Service

HP 3 year 4 hour 13x5 ProLiant ML110 Hardware Support U4434E

HP 3 year 4 hour 24x7 ProLiant ML110 Hardware Support U4435E

##### Hardware Services 6-Hour Call to Repair On-Site Service

HP 3 year 6 hour 24x7 Call to Repair ProLiant ML110 Hardware Support U4436E

##### Hardware Installation

HP Install ProLiant ML110 Service U4444E

**NOTE:** For more information, customer/resellers can contact:  
<http://www.hp.com/services/carepack>.

# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Memory

#### HP ProLiant ML110 G7 Models

**NOTE:** Memory configurations listed do not apply to "Factory Integrated Models".

#### Standard Memory

SATA Models:

2GB or 4 GB of PC3-10600E DDR3 UDIMM running up to 1333MHz with memory kits installed.

#### Standard Memory with Optional Memory

Up to 8GB of memory is available with the installation of standard and optional memory, 4x 2 GB PC3-10600E un-buffered ECC DDR3 SDRAM DIMM Memory kits.

**NOTE:** The below chart does not represent all possible memory configurations.

**NOTE:** For best performance, it is recommended that customer installs memory in identical pairs (Slots 1C and 3D are interleaving pair. Slots 2A and 4B are interleaving pair).

Memory		Slot			
		DIMM1C	DIMM2A	DIMM3D	DIMM4B
<b>Standard</b> (Entry Model)	<b>2 GB</b>	Empty	2 GB	Empty	Empty
<b>Standard</b> (Base Model)	<b>2 GB</b>	Empty	2 GB	Empty	Empty
<b>Standard</b> (Performance Model)	<b>4 GB</b>	Empty	2 GB	Empty	2 GB
<b>Maximum</b>	<b>16 GB</b>	4 GB	4 GB	4 GB	4 GB

#### Following are memory options available from HP:

##### HP Memory

HP 4GB (1x4GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit 500672-B21

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit 500670-B21

**NOTE:** All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: [www.hp.com/go/ddr3memory-configurator](http://www.hp.com/go/ddr3memory-configurator).




# QuickSpecs


## HP ProLiant ML110 Generation 7 (G7)

### Storage

1. - 4. Drive bays - Large Form Factor (LFF)

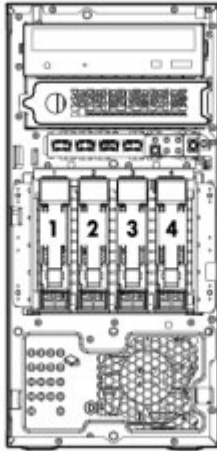


1. - 8. Drive bays - Small Form Factor (SFF)

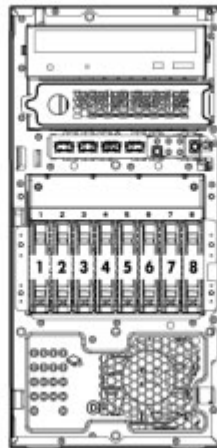


# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Storage

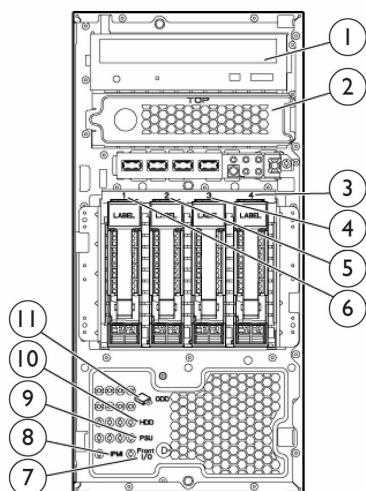

1. 1<sup>st</sup> removable media drive
2. 2<sup>nd</sup> removable media drive
3. 4<sup>th</sup> SAS/SATA hard drive
4. 3<sup>rd</sup> SAS/SATA hard drive
5. 2<sup>nd</sup> SAS/SATA hard drive
6. 1<sup>st</sup> SAS/SATA hard drive
7. Front I/O spare screw
8. IPMI spare screw
9. PSU module spare screws
10. HDD care spare screws
11. ODD spare screw

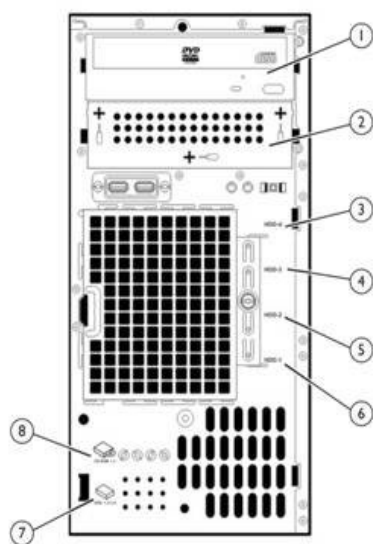

1. 1<sup>st</sup> removable media drive
2. 2<sup>nd</sup> removable media drive
3. 4<sup>th</sup> SAS/SATA hard drive
4. 3<sup>rd</sup> SAS/SATA hard drive
5. 2<sup>nd</sup> SAS/SATA hard drive
6. 1<sup>st</sup> SAS/SATA hard drive
7. HDD spare screws
8. Removable media drive spare screws

### Drive Support

	Quantity Supported	Position Supported	Controller
<b>Removable Media</b>			
DVD Drive	2	1 or 2	Integrated SATA
DVD-RW Drive	2	1 or 2	Integrated SATA

#### Hard Drives (SATA Models only)

**NOTE:** The components of a storage subsystem (e.g. the drive, the HBA/controller, and firmware) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

**NOTE:** Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Storage

#### SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
1TB 3G SATA 7.2K	Up to 4	3,4,5,6	Smart Array P212 Controller
500GB 3G SATA 7.2K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.

#### SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
250GB 3G 7.2K	Up to 4	3,4,5,6	Smart Array P212 Controller
160GB 3G 7.2K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.

#### SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
4TB 3G 7.2K	Up to 4	3,4,5,6	Smart Array B110i SATA RAID Controller (RAID 0/1/10)
2TB 3G 7.2K			<b>NOTE:</b> Hardware RAID support requires purchase of HP Smart Array P212 Controller.
1TB 3G 7.2K			
500GB 3G 7.2K			

#### SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives

	Quantity Supported	Position Supported	Controller
250GB 3G 7.2K	Up to 4	3,4,5,6	Smart Array B110i SATA RAID Controller (RAID 0/1/10)
160GB 3G 7.2K			<b>NOTE:</b> Hardware RAID requires purchase of HP Smart Array P212 Controller.

#### SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
1TB 3G SATA 7.2K	Up to 4	3,4,5,6	Smart Array P212 Controller
500GB 3G SATA 7.2K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Storage

#### SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
2TB 3G 7.2K	Up to 4	3,4,5,6	Smart Array P212 Controller
1TB 3G 7.2K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.
500GB 3G 7.2K			

#### SATA Hot Plug LFF (3.5-inch) Entry (ETY) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
250GB 3G 7.2K	Up to 4	3,4,5,6	Smart Array P212 Controller
160GB 3G 7.2K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.

#### SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
2TB 3G 7.2K	Up to 4	3,4,5,6	Smart Array P212 Controller
1TB 3G 7.2K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.
500GB 3G 7.2K			

#### SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
250GB 3G 7.2K	Up to 4	3,4,5,6	Smart Array P212 Controller
160GB 3G 7.2K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.

#### Hard Drives (SAS Models only)

##### SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

Quantity Supported	Position Supported	Controller
-----------------------	-----------------------	------------



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Storage

1.2TB 6G SAS 10K	Up to 4	3,4,5,6	Smart Array P212 Controller
900GB 6G SAS 10K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.
300GB 6G SAS 15K			
146GB 6G SAS 15K			

#### SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
600GB 6G SAS 15K	Up to 4	3,4,5,6	Smart Array P212 Controller
450GB 6G SAS 15K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.
300GB 6G SAS 15K			

#### SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
1TB 6G SAS 7.2K	Up to 4	3,4,5,6	Smart Array P212 Controller
500GB 6G SAS 7.2K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.

#### SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
600GB 6G SAS 15K	Up to 4	3,4,5,6	Smart Array P212 Controller
450GB 6G SAS 15K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.
300GB 6G SAS 15K			

#### SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
2TB 6G SAS 7.2K	Up to 4	3,4,5,6	Smart Array P212 Controller
1TB 6G SAS 7.2K			<b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.

#### SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Storage

	Quantity Supported	Position Supported	Controller
600GB 6G SAS 15K	Up to 4	3,4,5,6	Smart Array P212 Controller <b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.
450GB 6G SAS 15K			
300GB 6G SAS 15K			

#### SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

**NOTE:** SAS non-hot plug drives require HP SAS/Smart Array Controller.

	Quantity Supported	Position Supported	Controller
600GB 6G 15K	Up to 4	3,4,5,6	Smart Array P212 Controller <b>NOTE:</b> Transfer rates of drives are dependent on the maximum transfer rate supported by the Controller. Refer to the Controller technical specifications for details.
450GB 6G 15K			
300GB 6G 15K			

#### Maximum Storage Capacity - SATA/SAS Models

Internal	SATA	8.0TB (4 x 2TB)
	SAS	8.0TB (4 x 2TB)

#### Tape and Disk-Based Backup

**NOTE:** For the complete range of tape drives, autoloaders, libraries and media, including the internal fitting models, see: <http://www.hp.com/go/tape>. For the complete range of D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk and tape backup products see: <http://www.hp.com/go/connect>.

	Position	Recommended Controller	Part Number
<b>HP SCSI Tape Drives</b>	Internal or External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
LTO-1 Ultrium 232			
LTO-2 Ultrium 448			
LTO-3 Ultrium 920			
LTO-3 Ultrium 960			
LTO4 Ultrium 1760			
LTO-4 Ultrium 1840			
DAT 40			
DAT 72	External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
DAT 160			
<b>HP SCSI Rack Mount Kits</b>	External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
1U Rack-Mount Kit			
3U Rack-Mount Kit			





# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Storage

<b>HP USB Tape Drives</b> DAT 40 DAT 72 DAT 160 DAT 320	Internal or External	USB 2.0 Port	N/A
<b>HP USB Rack Mount Kits</b> 1U USB Rack-Mount Kit	External	USB 2.0 Port	N/A
<b>HP SAS Tape Drives</b> DAT 160 DAT 320 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 LTO-4 Ultrium 1840 LTO-5 Ultrium 3000 LTO-5 Ultrium 3280	Internal or External	HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462828-B21
<b>HP SAS Rack Mount Kits</b> 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462828-B21
<b>HP SCSI Tape Autoloaders</b> DAT 72x10 Autoloader 1/8 G2 Autoloader	External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
<b>HP SCSI Tape Libraries</b> MSL2024 MSL4048 MSL8096 MSL6000	External	HP U320e SCSI Dual Channel Host Bus Adapter	AH627A
<b>HP SAS Tape Autoloaders and Libraries</b> 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096	External	HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462828-B21
<b>HP Fibre Channel Tape Libraries</b> MSL2024 MSL4048 MSL8096 MSL6000	External	Please consult the EBS connectivity matrix at: <a href="http://www.hp.com/go/ebs">http://www.hp.com/go/ebs</a> for connectivity information and the supported Fibre Channel HBAs shown in this QuickSpecs.	



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Storage

<b>HP USB RDX Removable Disk Backup System</b> RDX160 RDX320 RDX500 RDX750 RDX 1TB	Internal or External	USB 2.0 port	N/A
<b>HP D2D Backup Systems, iSCSI</b> D2D2500i D2D4000i	External	Embedded Network Controller. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.	
<b>HP D2D Backup Systems, Fibre Channel</b> D2D4000fc	External	Direct server attach is not supported, requires connection via SAN fabric. See: <a href="http://www.hp.com/go/connect">http://www.hp.com/go/connect</a>	



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Power Specifications

HP 350W Factory Integrated Power Supply Kit							
Part Number	646146-B21						
Operational Input Voltage Range (Vrms)	100 to 240						
Frequency Range (Nominal) (Hz)	50/60						
Nominal Input Voltage (Vrms)	100	120	200	208	220	230	240
Max Rated Output Wattage Rating	350	350	350	350	350	350	350
Nominal Input Current (A rms)	4.7	3.9	2.3	2.2	2.0	1.9	1.9
Max Rated Input Wattage Rating (Watts)	475	465	450	450	450	450	450
Max. Rated VA (Volt-Amp)	476	466	456	455	455	455	456
Efficiency (%)	73.7	75.2	77.8	77.8	77.8	77.8	77.8
Power Factor	0.99	0.99	0.98	0.98	0.98	0.98	0.98
Leakage Current (mA)	<3.5						
Maximum Inrush Current (A peak)	20						
Maximum Inrush Current duration (mS)	N/A	N/A	N/A			N/A	N/A
Maximum British Thermal Unit Rating (BTU-Hr)	1551	1517	1493	1493	1493	1493	1493

HP 460W Common Slot Gold Hot Plug Power Supply Kit							
Part Number	503296-B21						
Input Voltage Range ( V rms )	100 to 240						
Frequency Range (Nominal) ( Hz )	50/60						
Nominal Input Voltage (Vrms)	100	120	200	208	220	230	240
Max Rated Output Wattage Rating	460	460	460	460	460	460	460
Nominal Input Current (A rms)	5.5	4.5	2.6	2.5	2.4	2.3	2.2
Max Rated Input Wattage Rating (Watts)	526	520	505	505	503	503	503
Max. Rated VA (Volt-Amp)	548	542	527	527	524	524	524
Efficiency (%)	87.5	88.5	91	91	91.5	91.5	91.5
Power Factor	0.97						
Leakage Current (mA)	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Maximum Inrush Current (A peak)	30						
Maximum Inrush Current duration ( mS )	20						
Maximum British Thermal Unit Rating (BTU-Hr)	1794	1773	1725	1725	1715	1715	1715



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### System Specifications

	<b>Power **</b>
<b>HP ProLiant ML110 G7 Fully Configured</b>	(see **)
Fully Loaded System output Wattage (W)	350W
Fully Loaded System Input Current (A rms)	5A @ 100V, 2.5A @ 200V
Fully Loaded System Thermal (BTU- Hr)	1658
Fully Loaded System VA (Volt-Amp)	490 VA
System Leakage with all power supplies loaded (mA)	0.45mA@110V 0.45mA@220V
System Inrush Current with all power supplies loaded (A)	<150A@240Vac
Power cord requirements	Nema 5-15P to IEC320-C13 IEC320-C13 to IEC320-C14
	**Power shown is for a fully configured system consisting of (1) CPU, (4) double-sided DIMMs, (4) HDDs, (1) DVD-ROM, (4) PCI cards, and (1) power supply.

	<b>Power **</b>
<b>HP ProLiant ML110 G7 Fully Configured</b>	(see **)
Fully Loaded System output Wattage (W)	460W
Fully Loaded System Input Current (A rms)	5.5A @ 100V, 2.6A @ 200V
Fully Loaded System Thermal (BTU- Hr)	1794
Fully Loaded System VA (Volt-Amp)	548
System Leakage with all power supplies loaded (mA)	0.5mA@110V 0.92mA@220V
System Inrush Current with all power supplies loaded (A)	30A/20mS @240Vac
Power cord requirements	Nema 5-15P to IEC320-C13 IEC320-C13 to IEC320-C14
	**Power shown is for a fully configured system consisting of (1) CPU, (4) double-sided DIMMs, (4) HDDs, (1) DVD-ROM, (4) PCI cards, and (1) power supply.

# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### System Specifications

Power Cords (13 Cord Sets)	Power Cord Part Number
Country	
Taiwan	393312-001
Japan	139867-005
India	397138-002
Brazil	285052-001
Australia	100661-001
Euro	100614-009
PRC	286496-001
UK	100613-008
US	121565-001
ITL	109197-008

**NOTE:** To review typical system power ratings use the Active Answers HP Power Advisor which is available via the online tool located at URL: <http://www.hp.com/go/hppoweradvisor>

To drill down to calculators:

- Click on: "ProLiant Servers"
- Click on the Server of interest. Example: ML110 G7
- Click on: "Power Calculator" link. (You may need to scroll down to see it)



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Technical Specifications

<b>System Unit</b>	<b>Dimensions</b> (HxWxD) (with feet)	14.4 x 6.9 x 18.6 in (36.7 x 17.5 x 47.25 cm)
	<b>Weight</b> (approximate)	Hot Plug LFF Full Loading Single Package weight 20.60kg (45.32 lb) Hot Plug LFF Full Loading without Package 16.20kg. (35.64 lb) Hot Plug LFF light Loading without Package 13.80kg. (30.36 lb) Hot Plug SFF Full Loading Single Package weight 21.40kg (47.08 lb) Hot Plug SFF Full Loading without Package 17.00kg. (37.4 lb) Hot Plug SFF light Loading without Package 14.60kg. (32.12 lb) Non Hot Plug LFF Full Loading Single Package weight 19kg (41.8 lb) Non Hot Plug LFF Full Loading without Package 14.60kg. (32.12 lb) Non Hot Plug LFF light Loading without Package 12.20kg. (26.84 lb)
<b>350W Input Requirements</b> (per power supply)	Rated Line Voltage	90 to 132 VAC, 180 to 264 VAC
	Rated Input Current	5 A (at 100 VAC), 2.5 A (at 200 VAC)
	Rated Input Frequency	47 to 63 Hz
	Rated Input Power	486W (at 100 VAC), 480 W (at 200 VAC)
<b>Power Specifications</b>	To review typical power ratings use the Power Advisor which is available via the online tool located at URL: <a href="http://www.hp.com/go/hppoweradvisor">http://www.hp.com/go/hppoweradvisor</a>	
<b>Power Supply Output</b> (per power supply)	Rated Steady-State Power	350 W (at 100 VAC), 350 W (at 200 VAC)
	Maximum Peak Power	350 W (at 100 VAC), 350 W (at 200 VAC)
<b>460W Input Requirements</b> (per power supply)	Rated Line Voltage	90 to 132 VAC, 180 to 264 VAC
	Rated Input Current	5.5 A (at 100 VAC), 2.6 A (at 200 VAC)
	Rated Input Frequency	47 to 63 Hz
	Rated Input Power	526W (at 100 VAC), 505 W (at 200 VAC)
<b>Power Specifications</b>	To review typical power ratings use the Power Advisor which is available via the online tool located at URL: <a href="http://www.hp.com/go/hppoweradvisor">http://www.hp.com/go/hppoweradvisor</a>	



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Technical Specifications

<b>Power Supply Output</b> (per power supply)	Rated Steady-State Power	460 W (at 100 VAC), 460 W (at 200 VAC)
	Maximum Peak Power	460 W (at 100 VAC), 460 W (at 200 VAC)
<b>System Inlet Temperature</b>	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System may shut down if operating with a fan fault or above 42°C (107.6°F).
	Non-operating	-35° to 65°C (-31° to 149°F). Maximum rate of change is 20°C/hr (36°F/hr).
<b>Relative Humidity</b> (non-condensing)	Operating	10% to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
	Non-operating	10% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
<b>Altitude</b>	Operating	3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 609 m/min (2000 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 609 m/min (2000 ft/min).
<b>Acoustic Noise</b>	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	Idle	
	L <i>WAd</i>	4.4 Bels
	L <i>pAm</i>	27.1 dBA
	Operating	
	L <i>WAd</i>	4.4 Bels
	L <i>pAm</i>	27.2 dBA
	<b>NOTE:</b> The listed sound levels above apply to standard SATA configurations. Additional options may result in increased sound levels.	
<b>Emissions Classification (EMC)</b>	<b>FCC Rating</b>	Class B
	<b>Normative Standards</b>	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Technical Specifications

**NOTE:** Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

<b>Integrated Lights-Out Standard (iLO 3) integrated on system board</b>	<b>Architecture</b>	PCI Express based health and remote management ASIC
	<b>Processor</b>	PCI Express RISC processor core running at 250MHz
	<b>Upgradeability</b>	Option firmware upgradeable via Flash ROM.
	<b>Video Support</b>	1600 x 1200 DVR max resolution
	<b>Interfaces</b>	One Ethernet Sideband connection (10/100/1000 Mb/s)
	<b>Memory</b>	128-MB SDRAM with ECC
	<b>Operating System Support</b>	Microsoft Windows 2008 R2
		Microsoft Windows 2008 (32 bit and 64 bit)
		Microsoft Windows Server 2008 Standard Edition (32bit and 64bit)
		Microsoft Windows Server 2008 Enterprise Edition (32bit and 64bit)
		Red Hat Enterprise Linux 5.5 (32 bit and 64 bit)
	<b>Client System Support</b>	Red Hat Enterprise Linux 6(32 bit and 64 bit)
		SUSE LINUX Enterprise Server 11 (32bit and 64bit)
		SUSE LINUX Enterprise Server 10 (32bit and 64bit)
		Microsoft Windows 7
		Microsoft Windows XP Professional Edition
		Microsoft Windows Vista Business and Ultimate Editions
	<b>Client Browser Support</b>	Red Hat Enterprise Desktop 5.00
		SUSE Linux Enterprise Desktop 11
		SUSE Linux Enterprise Desktop 10
		Microsoft Internet Explorer 8
	<b>Command Line Support</b>	Microsoft Internet Explorer 7
		Microsoft Internet Explorer 6
		Firefox 3.5 (on supported Windows and Linux systems)
		Firefox 3.0 (on supported Windows and Linux systems)
	<b>Security</b>	Secure Shell and serial port access
		Secure Socket Layer
	<b>Directory Support Services</b>	Secure Shell version 2 (Password and certificate)
		Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface
		AES encryption of video
		RC4 encryption of video
	<b>Driver Support</b>	Active Directory v1.0 (Windows 2008)
		HP ProLiant iLO 3 Management Controller Driver Package
	<b>Management protocols supported</b>	iLO Management Channel Interface Driver
		SNMP, IPMI 2.0 (System and LAN interface), DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP), HP RIBCL XML





# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Technical Specifications

**HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive**

**571232-B21**

<b>Capacity</b>	250,059MB		
<b>Height</b>	1.028 in. (26.1 mm)		
Maximum drive dimension			
<b>Width</b>	4.00 in (101.6 mm)		
<b>Depth</b>	5.787 in (147.0 mm)		
Maximum drive dimension			
<b>Interface</b>	Serial ATA		
<b>Transfer Rate</b>	3Gb/s		
(Maximum)			
<b>Native Command Queuing</b>	Supported		
<b>Seek Time</b>	Single Track	2.0 ms	
	(typical reads, including	Average	11 ms
	settling)	Full-Stroke	21.0 ms
		Rotational Speed	7,200 rpm
<b>Physical Configuration</b>	Bytes/Sector	512	
	Logical Blocks	488,397,168	
<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)		
(system inlet air temperature)			

**HP Half-Height 16X Max SATA DVD-ROM Optical Drive**

**Disk**

Applicable Disk	CD-ROM, CD-XA, CD-DA (Mode 1, Mode 2, Form 1 and 2) Photo CD (Single and Multi-session) Mixed Mode (Audio and Data combined) CD-R, CD-RW, DVD-ROM, DVD+R, DVD+RW
Capacity	4.7 GB (DVD-5) 8.54 GB (DVD-9)
<b>Block Size</b>	DVD Media 2,048 bytes
<b>Interface</b>	SATA 1.5Gb/s
<b>Access Times</b> (typical)	Random <140 ms
	Full-Stroke <250 ms
<b>Data Transfer Rate</b>	Sustained 21600 KB/s (16X) Maximum
<b>Cache Buffer</b>	2MB Minimum
<b>Start-up Time</b> (typical) (Not including tray in)	< 7 seconds
<b>Stop Time</b> (Not including tray in)	< 4 seconds
<b>Laser Parameters</b>	Type Semiconductor Laser GaAlAs
	Wave Length 780 ± 25 nm
<b>Operating Conditions</b>	Temperature 41° to 122° F (5° to 50° C)
	Humidity 10% to 90%



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Technical Specifications

	<b>Dimensions</b>	(HxWxD, maximum) Weight	1.7 x 5.85 x 8.11 in (42.9 x 150 x 195 mm) 2.64 lb (1.2 kg)
<b>HP Half-Height 16X Max SATA DVD-RW Optical Drive</b>	<b>Disk</b>	Applicable Disk	CD-ROM, CD-XA, CD-DA (Mode 1, Mode 2, Form 1 and 2) Photo CD (Single and Multi-session) Mixed Mode (Audio and Data combined) CD-R, CD-RW, DVD-ROM, DVD+R, DVD+RW
		Capacity	4.7 GB (DVD-5) 8.54 GB (DVD-9)
	<b>Block Size</b>	DVD Media	2,048 bytes
	<b>Interface</b>	SATA	1.5Gb/s
	<b>Access Times</b> (typical)	Random	<140 ms
		Full-Stroke	<250 ms
	<b>Data Transfer Rate</b>	Sustained	21600 KB/s (16X) Maximum
	<b>Cache Buffer</b>	2MB Minimum	
	<b>Start-up Time</b> (typical) (Not including tray in)	< 7 seconds	
	<b>Stop Time</b> (Not including tray in)	< 4 seconds	
	<b>Laser Parameters</b>	Type	Semiconductor Laser GaAlAs
		Wave Length	780 ± 25 nm
	<b>Operating Conditions</b>	Temperature	41° to 122° F (5° to 50° C)
		Humidity	10% to 90%
	<b>Dimensions</b>	(HxWxD, maximum)	1.7 x 5.85 x 8.11 in (42.9 x 150 x 195 mm)
		Weight	2.64 lb (1.2 kg)
<b>HP NC112i 1-port Ethernet Network Interface Server Adapter</b>		10Base-T/ 100Base-TX/ 1000Base-TX	
	<b>Ports</b>	Single Port	802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q PCIe Rev. 2.0 (2.5 GHz) x1 FCC (U.S. only) Class B DOC (Canada) Class B CE EN 55024, EN55022 Class B VCCI Class II UL 1950 CSA 950 EN 60950 CE ACPI 1.0 MicroSoft WHQL (Windows Hardware Quality Labs)



# QuickSpecs

## HP ProLiant ML110 Generation 7 (G7)

### Technical Specifications

<b>Data Transfer Method</b>	Singlelane (x1)	
<b>Controller</b>	Intel 82574L	
<b>Network Transfer Rate</b>	10Base-T (Half-Duplex)	10 Mb/s
	10Base-T (Full-Duplex)	20 Mb/s
	100Base-TX (Half-Duplex)	100 Mb/s
	100Base-TX (Full-Duplex)	200 Mb/s
	1000Base-TX (Half and Full-Duplex)	2000Mb/s
<b>Connector</b>	RJ-45 connector	
<b>Cable Support</b>	10Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)
	10/100/1000Base-TX	Category 5 UTP; up to 328 ft (100 m)

#### Environment-friendly Products and Approach

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2013 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

