

[Get a Quote](#)

Overview

Cisco 4351 Integrated Services Router, which supports 3 Network Interface Modules (NIM) slots, delivers 200 Mbps to 400 Mbps aggregate throughput. The Cisco C1-CISCO4351/K9 is the 4351 Cisco ONE Software Bundle.

Quick Spec

Figure 1 shows the appearance of C1-CISCO4351/K9.

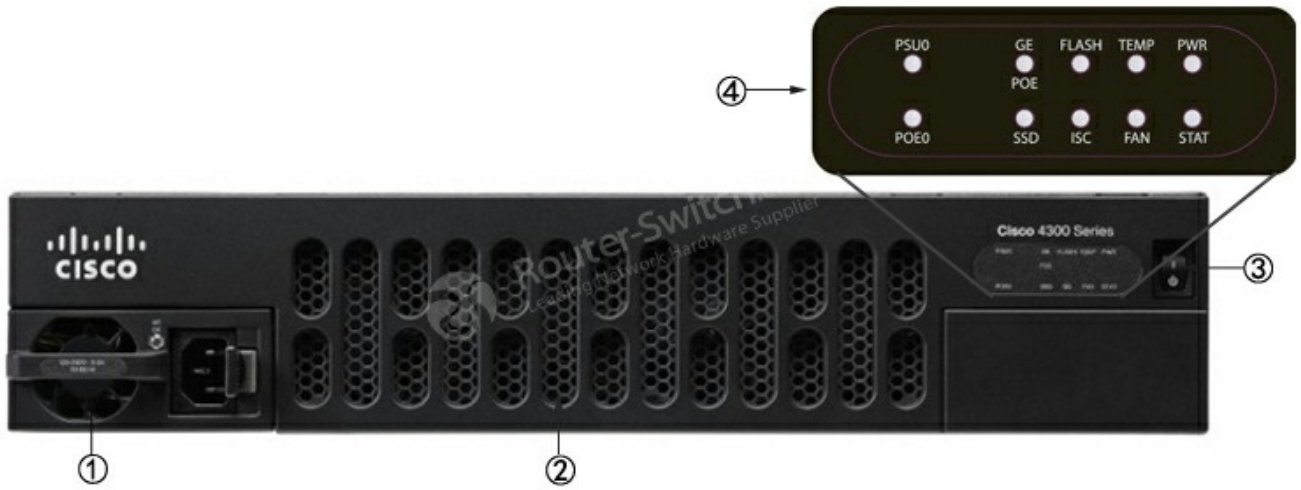


Table 1 shows the quick spec.

Product Number	C1-CISCO4351/K9
Product Description	Cisco ONE ISR 4351 (3GE.3NIM.2SM.4G FLASH.4G DRAM.IPB)
Aggregate Throughput	200 Mbps to 400 Mbps
Total onboard WAN or LAN 10/100/1000 ports	3
RJ-45-based ports	3
SFP-based ports	3
NIM slots	3
OIR (all I/O modules)	Yes
Onboard ISC slot	1
Default flash memory	4 GB
Maximum flash memory	16 GB

Product Details

Figure 2 shows the LEDs on the front panel of the Cisco ISR4351/K9 for reference. C1-CISCO4351/K9 is similar with it.



Note:

(1)	Power supply unit	(3)	Router power On/Off switch
(2)	Router fan tray	(4)	LEDs

·The router fan tray is hidden behind the removable bezel.


·LEDs include ten indicators.

Table 2 shows the LED descriptions.

LEDs	Represents	Color	Description
PSUO	Power Supply Unit (P0 and P1) Status	Green	PSU is on and is providing power.
		Amber	PSU is on but with errors or in a failure condition.
		Off	Power supply is turned off.
POEO	POE PSU	Green	PoE is on and providing power.
		Amber	PoE is in a failed condition.
		Off	PoE supply is not present.
GE POE	Internal PoE Daughter Card Status	Green	PSU is installed and providing power
		Amber	PSU is installed but in a failure condition.
		Off	PSU is off.
FLASH	System Flash Status	Blinking Green	Compact flash/eUSB flash is present and currently being accessed.
TEMP	Temperature Status	Solid green	All temperature sensors in the system are within acceptable range.
		Amber	One or more temperature sensors in the system are outside the acceptable range.
		Off	Temperature is not being monitored.
PWR	System Power	Green	System power is on and functioning correctly.
		Green blinking	System power is in the process of shutting down.
		Amber	System power is up, but low level initialization failed.
		Amber blinking	System power is up, but the system failed to come out of reset.
		Off	System power is off.

SSD	mSATA Slot Status	Green	SSD mSATA is present and enabled.
		Amber	Initialized with error.
		Off	Not present.
ISC	ISC Slot Status	Green	PVDM4 is present and enabled.
		Amber	Initialized with error.
		Off	Not present.
FAN	Fan Status	Green	All fans are operating.
		Amber	One fan has stopped working.
		Blinking Amber	Two or more fans have stopped working, or the fan tray has been removed.
		Off	Fans are not being monitored.
STAT	System Status	Solid green	System operating normally.
		Blinking amber	BIOS/Rommon is booting.
		Amber	BIOS/Rommon has completed booting, and system is at Rommon prompt or booting platform software.
		Off	System is not out of reset or BIOS image is not loadable.

Figure 3 shows the back panel of Cisco C1-CISCO4351/K9.

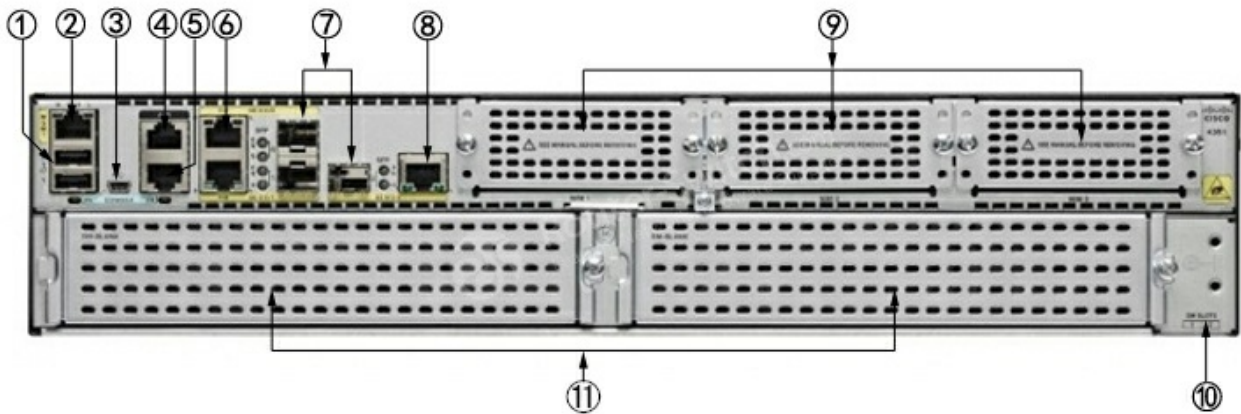

Note:

(1)	USB Type A port	(7)	SFP port (GE 0/0/0)
(2)	GE management port	(8)	RJ-45 port (GE/0/0/2)
(3)	USB Type B mini port	(9)	NIM slots
(4)	Auxiliary port	(10)	Ground connection
(5)	Console port	(11)	Enhanced Service Module (SM-X) slot
(6)	RJ-45 port (GE 0/0/1)		

The NIMs support 2 single-wide or 1 double-wide.

The Modules, Cards, Licenses & Accessories

Table 3 shows some recommended modules, cards, licenses and several cables.

Items	Models	Descriptions
Smart Serial Cables	CAB-SS-449FC	Cisco CAB-SS-449FC RS-449 Cable, DCE Female to Smart Serial, 10 Feet
	CAB-SS-V35FC	Cisco CAB-SS-V35FC V.35 Cable, DCE Female to Smart Serial, 10 Feet
Console and Auxillary Cables	CAB-AUX-RJ45	Cisco CAB-AUX-RJ45 Auxiliary Cable 8ft with RJ45 and DB25M
	CAB-ETH-S-RJ45	Cisco Router Cable CAB-ETH-S-RJ45
	CAB-CONSOLE-RJ45	Cisco CAB-CONSOLE-RJ45 Console Cable 6ft with RJ45 and DB9F
	CAB-CONSOLE-USB	Cisco CAB-CONSOLE-USB Console Cable 6 ft with USB Type A and mini-B
Licenses	L-SL-4350-APP-K9=	Cisco AppX license L-SL-4350-APP-K9= with 1300 conns/ISRWAAS or vWAAS for ISR4351
Network Interface Modules	NIM-1MFT-T1/E1	Cisco Fourth-Generation Multiflex Trunk Voice and WAN network interface module
	NIM-2CE1T1-PRI	Cisco Multiflex Trunk Voice and WAN network interface module
	NIM-4E/M	Analog voice network interface card (ear and mouth)
	NIM-2FXS	Cisco Analog voice network interface card NIM-2FXS
	NIM-2FXS/4FXO	Cisco Analog voice network interface card NIM-2FXS/4FXO
	NIM-8MFT-T1/E1	Cisco Fourth-Generation Multiflex Trunk Voice and WAN network interface module
SFPs for On-Board GE Ports	GLC-SX-MMD	Cisco GLC-SX-MMD 1000BASE-SX SFP transceiver module, MMF, 850nm, DOM
	GLC-LH-SMD	Cisco GLC-LH-SMD 1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM
	GLC-ZX-SMD	Cisco GLC-ZX-SMD 1000BASE-ZX SFP transceiver module, SMF, 1550nm, DOM

Compare to Similar Items

Table 4 shows the comparison between **C1-CISCO4351/K9** and **C1-CISCO4331/K9**

Product Number	C1-CISCO4351/K9	C1-CISCO4331/K9
Product Description	Cisco ONE ISR 4351 (3GE.3NIM.2SM.4G FLASH.4G DRAM.IPB)	Cisco ONE ISR 4331 (3GE.2NIM.1SM.4G FLASH.4G DRAM.IPB)
Aggregate Throughput	200 Mbps to 400 Mbps	100 Mbps to 300 Mbps
Total onboard WAN or LAN 10/100/1000 ports	3	3
RJ-45-based ports	3	2
SFP-based ports	3	2
NIM slots	3	2
Onboard ISC slot	1	1

Get more information

Do you have any question about the C1-CISCO4351/K9?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

C1-CISCO4351/K9 Specification

Product Number	C1-CISCO4351/K9
Product Description	Cisco ONE ISR 4351 (3GE.3NIM.2SM.4G FLASH.4G DRAM.IPB)
Aggregate Throughput	200 Mbps to 400 Mbps
Total onboard WAN or LAN 10/100/1000 ports	3
RJ-45-based ports	3
SFP-based ports	3
Enhanced service-module slots	2
Doublewide service-module slots	1 (assumes no singlewide SM-X modules installed)
NIM slots	3
OIR (all I/O modules)	Yes
Onboard ISC slot	1
Default memory double-data-rate 3 (DDR3) error-correction-code (ECC) DRAM (Combined control/services/data planes)	4 GB
Maximum memory DDR3 ECC DRAM (Combined control/services/data planes)	16 GB
Default memory DDR3 ECC DRAM (data plane)	NA
Maximum memory DDR3 ECC DRAM (data plane)	NA
Default memory DDR3 ECC DRAM (control/services plane)	NA
Maximum memory DDR3 ECC DRAM (control/services plane)	NA
Default flash memory	4 GB
Maximum flash memory	16 GB
External USB 2.0 slots (type A)	2
USB console port -type B mini (up to 115.2 kbps)	1
Serial console port - RJ45 (up to 115.2 kbps)	1
Serial auxiliary port - RJ45 (up to 115.2 kbps)	1
Power-supply options	Internal: AC, DC, and PoE
Redundant power supply	N/A
AC input voltage	100 to 240 VAC autoranging
AC input frequency	47 to 63 Hz
AC input current range, AC power supply (maximum)	7.1 to 3.0A
AC input surge current	60 A peak and less than 12 Arms per half cycle

Typical power (no modules) (watts)	48
Maximum power with AC power supply (watts)	430
Maximum power with PoE power supply (platform only) (watts)	990
Maximum endpoint PoE power available from PoE power supply (watts)	500

Download Resource

Support and Resources

 [Cisco ISR 4000 Series Router Datasheet](#)

 [Comparison of Cisco ISR 4000 Models](#)

 [Cisco 4000 Series Integrated Services Routers Frequency Asked Question](#)

Transition Guide

 [Guide to Select New Cisco Routers](#)

 [Guide to Upgrade Your ISR G1 and ISR G2 Routers to ISR 4000](#)

Want to Buy

Order Now

Get a Quote

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



16,000+

Customers Trusted



200+

Countries we Sold



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

● Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166

● Fax: +852-3050-1066 (Hong Kong)

● Email: sales@router-switch.com